


MAX. VOC 100 g/L

This product meets SCAQMD Rule 1113-Architectural coatings; Primers, Sealers, and Undercoaters

Modern Masters Inc.
Valencia, CA 91355 USA
(800) 942-31661
modernmasters.com

© 2015, Modern Masters Inc.
Made in USA

CONFORMS TO ASTM D4236



METAL EFFECTS®


PRIMER

Use to Protect Wood & Metal Surfaces
Before Applying Metal Effects
Oxidizing Paints & Patinas

Water Base

1 US Gal. / 3.78 L

Low VOC

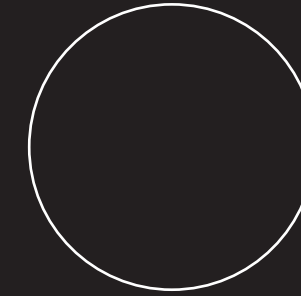

- Water Base
- Interior/Exterior
- Apply with Brush, Roller or Spray Equipment

COVERAGE COBERTURA 300-325 sq ft / gal pies cuadrados / gal
Minimum two coats recommended <i>Se recomienda un minimo de dos capas</i>

 Drying Time <i>Tiempo de Secado</i> @ 70% RH	55°F+
	Recoat: 30 min. <i>Repintar: 30 minutos</i>
Dry Time: 12 hours <i>Tiempo de Secado: 12 horas</i>	
Temperature and humidity dependent <i>Dependiente de temperatura y humedad</i>	

Metal Effects Primer is a unique water base acrylic primer. Unlike other primers, it is able to block **Metal Effects Patina Aging Solutions** and **Rust Activator** from reaching the metal or wood substrate. This prevents the formation of rust and blocks tannic acids (contained in wood) from rising to the finished surface.

WHERE TO USE: *Metal Effects Primer* can be applied to metal, wood, masonry, brick and plaster.

SURFACE PREPARATION: All surfaces should be sound, clean and dry prior to priming. Remove all loose, peeling paint. Surfaces previously primed require light sanding. Scuff sand glossy surfaces. Some metal surfaces, such as bare aluminum, galvanized iron, or rough metals, will need a 100% acrylic metal primer or a water base anti-corrosive primer applied before the application of *Metal Effects Primer*. Clean and prime the metal per the metal primer label instructions.

APPLICATION: Stir well before use and occasionally during application. DO NOT THIN! Apply at least two coats of *Metal Effects Primer*. Use a brush or a roller appropriate for water base primers. To spray, use HVLP or quality airless spray equipment. Do not apply below an air temperature of 55°F (13°C). It is

important that *Metal Effects Primer* is completely dry before applying **Metal Effects Oxidizing Paint**.

CLEANUP: Clean tools, brushes and equipment with warm soapy water immediately after use.

WARNING! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

HANDLING & STORAGE: Clean up spills promptly. When not in use, close container tightly and store at room temperature. **DO NOT ALLOW PRODUCT TO FREEZE.** Do not reuse this container and dispose of empty container properly.

HEALTH & SAFETY: Use only with adequate ventilation. Ensure fresh air entry during application and drying. If you experience eye watering, headache or dizziness or if air monitoring demonstrates

vapor/mist levels are above applicable limits, wear an appropriate, properly fitting respirator (NIOSH approved) during and after application. Follow respirator manufacturer's directions for respirator use. Causes eye irritation. Avoid contact with eyes, skin and clothing. Wash thoroughly after handling. Do not take internally. **First Aid:** If you experience difficulty in breathing, leave the area to obtain fresh air. If continued difficulty is experienced, get medical attention immediately. In case of eye contact, flush with plenty of water for at least 15 minutes. Get medical attention if irritation occurs or persists.

KEEP OUT OF REACH OF CHILDREN
WARRANTY: This product will perform as claimed if directions are followed. Directions are as complete as possible, but cannot encompass all conditions, applications, techniques, and/or surfaces, which are beyond our control. Warranty is limited to replacement or refund value of product actually used, if such product proves defective within two years of manufacture. No other warranty is expressed or implied.

Visit modernmasters.com for more information on our Metallic Paints, Architectural Textures, Theme Paint, Blacklight Paints, Glazes, Varnishes and Crackles.