

MAX. VOC 50 g/L.

This product meets SCAQMD Rule
1113-Architectural coatings;
Faux Finishing category -
Trowel Applied Coatings

Modern Masters Inc.
Valencia, CA 91355
(800) 942-3166
modernmasters.com


© 2016, Modern Masters Inc.

Made in USA



Luster

Create Beautiful Shimmering Wall Finishes

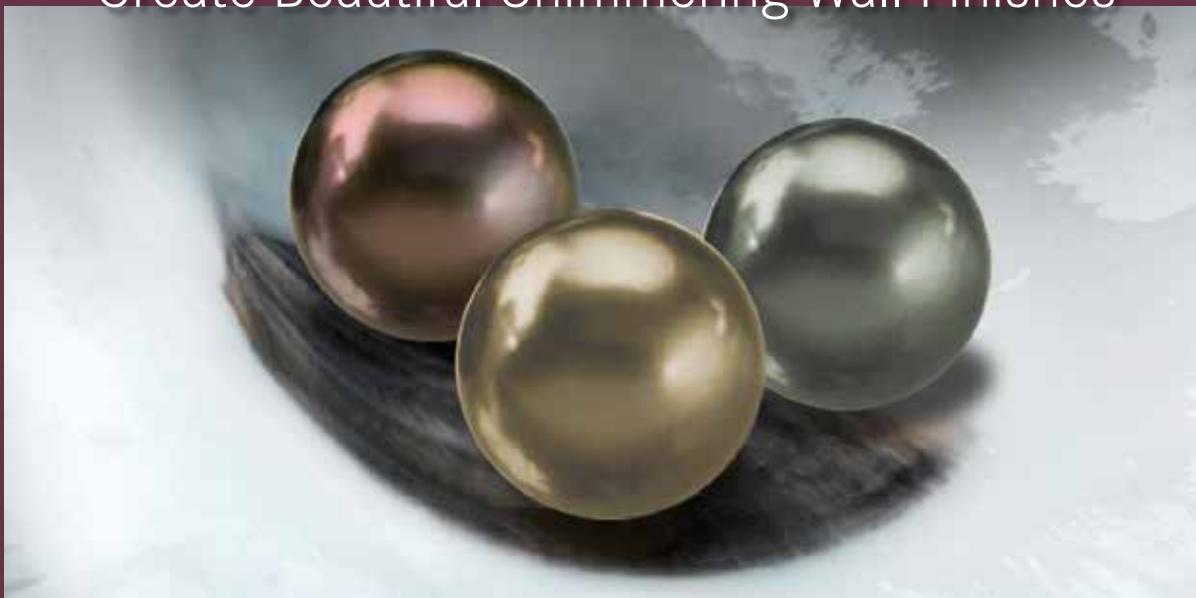


Metallic Plaster
Pre-Colored Decorative Architectural Coating

Ready To Use

1 US Gal. | 3.78 L

Water Base



To view instructional videos,
visit Modern Masters YouTube Channel

BASIC TOOLS HERRAMIENTAS BÁSICAS 	COVERAGE COBERTURA 240-320 sq ft / gal pies cuadrados / gal	 Drying Time Tiempo de Secado @ 70% RH 60°F+
Trowel/Sea Sponge Roller Llana/Rodillo de Esponja Marina	Depends on tools and techniques. Depende de herramientas y técnicas.	Dry to touch in 1-2 hours. Recoat in 2-3 hours. Dry times will vary depending on temperature, humidity and film thickness. Seco al tacto en 1-2 horas. Repintar en 2-3 horas. El tiempo para secar variará dependiendo en la temperatura, humedad y grosor de las capas de pintura.

Metallic Plaster is a water base pre-colored plaster, containing several mica, glass and pearlescent particles, which impart a beautiful shimmering finish when applied in layers of the same color or multiple colors. It has excellent open time during application, dries to an extremely durable finish and can be over glazed with ease. *Metallic Plaster* can be used to create a wide variety of decorative finishes by using various tools and techniques. **View application videos and get inspired at modernmasters.com**

SURFACE PREPARATION: The surface should be free of imperfections, sealed with an acrylic primer-sealer and have a low sheen. We recommend *Zinsser's Bulls Eye 1-2-3*. Allow the primed surface to dry completely, preferably overnight. The primed surface must be entirely free of dust, dirt, oil, grease, and other contaminants. Use a NIOSH approved respirator when sanding and when working with old, loose paint particles. Provide adequate ventilation.

BASIC APPLICATION: **Stir the product thoroughly before use, do not shake.** **Basecoat:** Basecoat surface tinted to a similar color as final finish.

First coat: Roll on first coat using 3/8th or 1/2 inch nap roller. This technique will

produce peaks that should be “knocked down” by smoothing lightly with a trowel while plaster is still wet.

Second and Third coats: A skim coat of the same color Metallic Plaster is applied using a trowel. Hold trowel at a 60° angle and force the skim coat into the “valleys” of texture.

CLEAN UP: Clean trowels, rollers, brushes, etc. with soap and warm water immediately after use. Promptly wipe up spills and splatters with a damp cloth. Do not pour unused contents down the drain. Do not reuse containers and properly dispose of empty containers.

HANDLING & STORAGE: Tightly close container when not in use. Store the product in a cool dry place, away from direct sunlight. If contents freeze, allow thawing at room temperature. **Stir well before use.** **Disposal:** Dispose of unused or unwanted product in accordance with local laws regulating water base coatings.

HEALTH & SAFETY: Use in a well-ventilated area. Avoid contact with eyes. Wash hands thoroughly with soap and warm water after use. Do not take internally. When spraying or sanding, use a properly-fitting, NIOSH approved respirator per the manufacturer's instructions.

Dry to touch in 1-2 hours. Recoat in 2-3 hours. Dry times will vary depending on temperature, humidity and film thickness.
Seco al tacto en 1-2 horas. Repintar en 2-3 horas. El tiempo para secar variará dependiendo en la temperatura, humedad y grosor de las capas de pintura.

KEEP OUT OF REACH OF CHILDREN

WARNING! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

WARRANTY: This product will perform as claimed if directions are followed. Directions are as complete as possible, but cannot encompass all conditions, applications, techniques, and/or surfaces, which are beyond our control. Product Warranty is limited to replacement or refund value of product actually used, if such product proves defective within two years of manufacture.

Visit modernmasters.com for Technical Data Sheets, Material Safety Data Sheets, Application Instructions and the latest information on all our specialty water base paints and coatings.